


DIFFERENTIAL PRESSURE MONITOR (v1) PM277

DESCRIPTION


The DIFFERENTIAL PRESSURE MONITOR PM277 provides a retransmit output and an alarm contact for applications requiring electronic differential pressure monitoring. Due to its total width of only 22.5mm and the 35mm DIN-Rail mounting arrangement the PM277 is ideal for "nestmounting" in field enclosures or as a space saver in larger control cabinets. The heart of the PM277 is a piezoresistive silicon pressure transducer, providing high accuracy, long life and total adjustability. The base unit contains a stable bridge supply, preamplifier, scaling amplifier and a comparator circuit driving a high power relay. The trip point and switching hysteresis are adjustable from the front of the module. A 2mm test socket is used for trip adjustment within a 0 - 5V trip set range calibrated to correspond to the input differential pressure range. Trip status is indicated by a red L.E.D. on the front. High or low setting is selectable internally by solderless coding plugs. Optional features include a wide choice of retransmit analogue output signals for 5kPa range upwards. Power supply can be 12 or 24Vdc or low level (non isolated) AC voltage.

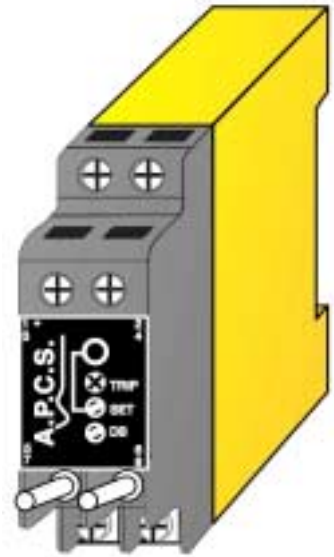


Trip set example:

Input range: ΔP 0 - 1kPa.
Trip set range: 0 - 5Vdc (test socket to terminal 2).
Required trip point: 0.2kPa.
Set trip to: $\frac{5}{1} \times 0.2 = 1V$

General Specifications

Size: 22.5W x 68H x 120D (mm)
Mounting: Clip for 35mm DIN-Rail.
Housing material: Polycarbonate.
Electrical connection: Screw terminals.
Pneumatic connection: Barbed nozzle for 3.5 - 4mm I.D. tube. Optional quick connector "one touch" for 3.2mm O.D. tube.
Weight: 100 kg.
Protection class: IP40 (IP65 Enclosure opt.).
Input pressure ranges: 2kPa up to 0 - 200kPa. (0.3 PSI up to 30 PSI).
Medium compatibility: Air, low pressure steam, gasoline and oil vapours, ethylene glycol.
Over pressure (max): 100kPa (all ranges).
Static pressure: 100kPa.
Accuracy: <1% of range (2% <2kPa range).
Linearity: $\pm 1\%$ of range.
Pressure hysteresis: 0.05% of range.
Temperature drift: 0.02% per °C.
Relay contact: Normally open or normally closed (internally selectable).
8A/250Vac resistive.
3.5A/250V inductive.
Switching hysteresis (DB): 0.5 - 5%.
Permissible power supply swing: -20...+30%.
Electromagnetic compatibility: Complies with AS/NZS 4251.1 (EN 50081.1) 

Block Diagram

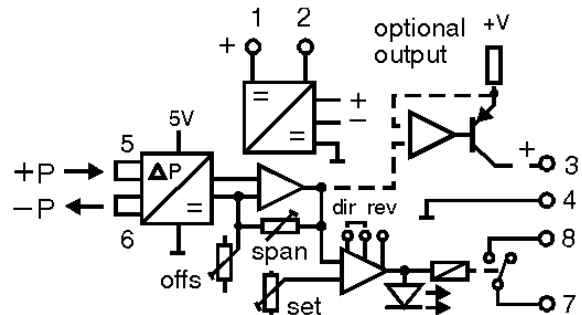

For input / output combinations refer to TYPE NO. DESIGNATION overleaf.

TYPE NO. DESIGNATION

PM277 - X X X X X

Power Supply:

- | | |
|--------------------------|--------------------------------------|
| 1 = 12Vdc (30mA - 50mA). | # 3 = 12Vac (non isol). |
| 2 = 24Vdc (50mA - 70mA). | # 4 = 24Vac (non isol). |
| | *) 9 = Other (Low voltage, Specify). |

Input:

- | | |
|-------------------------|---|
| 1 = 0 - 2kPa (0.3PSI). | 5 = 0 - 50kPa (7.5 PSI). |
| 2 = 0 - 5kPa (0.75PSI). | 6 = 0 - 100kPa (15.0PSI). |
| 3 = 0 - 10kPa (1.5PSI). | 7 = 0 - 150kPa (22.5PSI). |
| 4 = 0 - 20kPa (3.0PSI). | 8 = 0 - 200kPa (30.0PSI). |
| | 9 = Other pressure 200kPa max. (Specify). |

*) Retransmit Output: (for $\geq 5kPa$ Range)

- (For 24VDC supply only - 12VDC models have reduced output drive).
- | | |
|---------------------------------|-----------------------------------|
| 0 = None. | 5 = 0 - 10V (500k Ω min). |
| 1 = 0 - 1mA (10k Ω max). | 6 = 1 - 5V (100k Ω min). |
| 2 = 0 - 5mA (2k Ω max). | 7 = 4 - 20mA (500 Ω max). |
| 3 = 0 - 1V (100k Ω min). | 8 = 10 - 50mA (200 Ω max). |
| 4 = 0 - 5V (100k Ω min). | *) 9 = Other (Specify). |

Options:


- | | |
|---------------------------------------|-------------------------|
| 0 = None. | *) 9 = Other (Specify). |
| 3 = Open collector transistor output. | |

Nozzle Type:

- 1 = Barbed fitting for 3.5 - 4mm I.D. soft tube.
 *) 2 = Quick connection for 3.2mm (1/8") O.D. tube (recommended tube SMC TE 1800 BG)

Front Control Explanation


- 1) Test socket . Reference to terminal 2 for trip adjustment.
- 2) Status indicator. ON = relay energised.
- 3) Trip set adjustment (15 turns).
- 4) Dead band (Hysteresis) adjustment (15 turns).



Typical Applications

- Filter blockage monitoring.
- Air flow monitoring using venturi, orifice or pitot tube.
- Level detection using "bubble tube" principal.

Connection Diagram

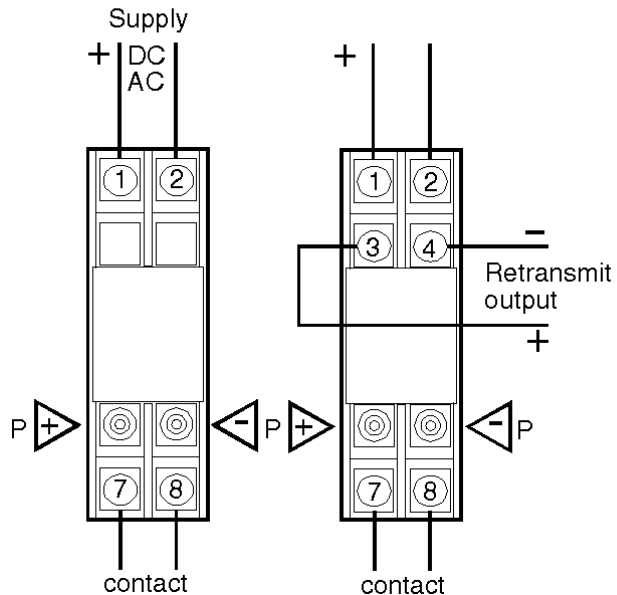

= Not Suitable For Units With Retransmit Output.

*) Price Extra.

In the interest of development and improvement, A.P.C.S. Pty. Ltd. reserve the right to amend, without notice, details contained in this publication. A.P.C.S. PTY. LTD. will accept no legal liability for any errors, omissions or amendments.